




# SPECIFICATION SHEET

## GNSS Active Antenna

<b>MESSERS.</b>	
<b>DESCRIPTION</b>	<b>GPS&amp;GNSS INTERNAL ANTENNA</b>
<b>PART No.</b>	<b>FES-140E0</b>

ACCEPTANCE		
PREPARED	CHECKED	APPROVED
/	/	/

SUPPLIER		
PREPARED	CHECKED	APPROVED
		
<b>09/04</b>	<b>09/04</b>	<b>09/04</b>

**◆ INDEX**

— INDEX	----- 2
— REVISION HISTORY	----- 2
— APPLICATION	----- 3
— KEY FEATURES	----- 3
— ELECTRICAL SPECIFICATION	----- 4
— ENVIRONMENTAL SPECIFICATION	----- 5
— MECHANICAL SPECIFICATION	----- 5
— ANTENNA DIMENSION	----- 6

**◆ REVISION HISTORY**


NO	DATE	REVISION	NOTE	AUTHORS
1	2024.09.04	00	First Draft	LEE.

**◆ APPLICATION**

- Location information
- Unmanned Aerial Vehicle Navigation
- Telematics and Navigation
- Autonomous vehicles
- Satellite Realtime Navigation
- Vehicle Tracking
- Logistics and Shipping
- Agriculture machine

**◆ KEY FEATURES**

- GPS/BEIDOU/GLONASS/GALILEO/QZSS/L1
- GPS&GNSS L1 BAND Internal Antenna
- Active Gain 28dB
- Voltage Range 2.2V~5.0V
- Low Noise Figure

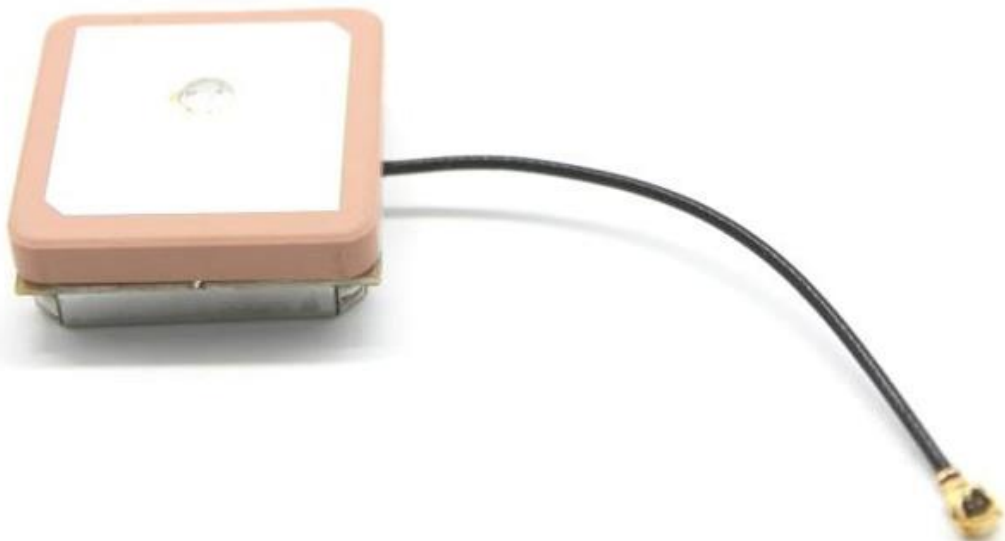

**◆ ELECTRICAL SPECIFICATION**

ITEM		SPECIFICATIONS
Antenna	Frequency	GPS L1 GLONASS G1 BEIDOU B1 QZSS Galileo E1
	Polarization	RHCP Right-hand-circulator
	Axial Ratio(min)	≤3dB
	V.S.W.R	≤2.0
	Peak Gain	5.0dBi(Zenith)
	Impedance	50Ω
	Antenna Dimension	25x25x4mm

**❖ LNA**

ITEM		SPECIFICATIONS
LNA	Gain	28 ± 2dB
	Noise Figure	≤1.5dB
	Supply Voltage	2.2-5.0V
	Current Consumption	15mA Typ.
	V.S.W.R	≤2.0

**◆ ENVIRONMENTAL AND MECHANICAL SPECIFICATION**



ITEM	SPECIFICATIONS
Operating Temperature	-40°C~+85°C
Storage Temperature	-40°C~+85°C
Dimensions	25.0x25.0x8.2mm
Cable	RF1.13mm Mini Coaxial(Others Cable)
Connector	IPEX Connector Standard (Other Connectors)

RoHS Compliant

**❖ GNSS FREQUENCY BAND**

GPS/GNSS FREQUENCY BAND					
GPS /QZSS	L1	L2	L5	L6	
	1575.42MHz	1227MHz	1176MHz	1278MHz	
GLONASS	G1	G2	G3		
	1602MHz	1248MHz	1207MHz		
GALILEO	E1	E5a	E5b	E6	
	1575.42MHz	1176MHz	1202MHz	1278MHz	
BEIDOU	B1	B2a	B2b	B3	
	1561MHz	1176MHz	1207MHz	1268MHz	
SBAS	L1	G1	L5	G2	G3
	1575.42MHz	1602MHz	1176MHz	1248MHz	1207MHz
L-BAND IRNSS	L-BAND	IRNSS			
	1542MHz	1176MHz			

◆ ANTENNA DIMENSION

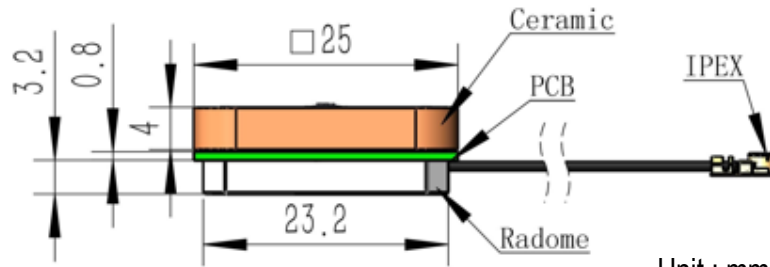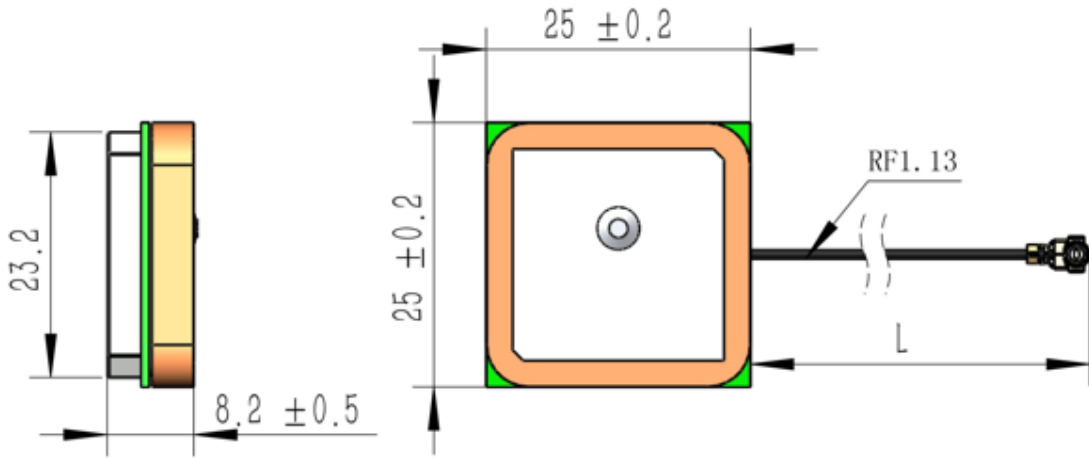

Unit : mm  
Tolerance: ±1.0mm

◆ Radiation Pattern

